




The photograph may not match the reference exactly. Please read the product description to identify the finish.

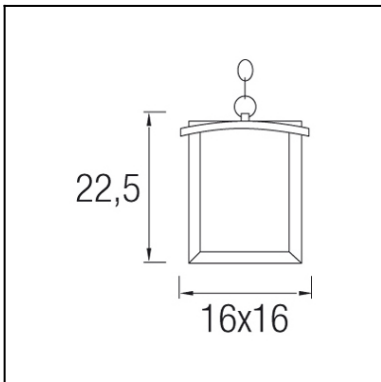

TECHNICAL CHARACTERISTICS

Type:	Pendant
IP Protection degrees:	IP23
Light source 1:	1 x E27 MAX 100W Maximum lamp length: 150.00 mm
Total power consumption (W):	100
Voltage / Frequency:	220-240V/50-60Hz
Warranty (Years):	2
Units per box:	6
Net Weight (Kg):	1.28
EAN:	8435381411466



MATERIALS / FINISHES


Structure material: Injected aluminium

Diffuser material: Polycarbonate


Structure finish: White

Diffuser finish: Matt opal

PL 18W



Download photometric file .ldt / .ies

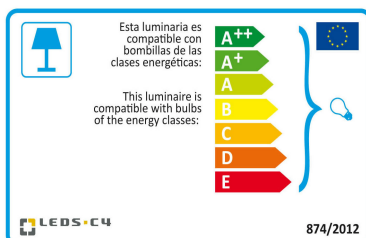

Click on image to download energy label

71-9405-M3-M3**Structure material:**

Polycarbonate

Structure finish:


Matt

IP65

Luminaire			Measurem.			Lamp		
Code	00-9298-14-M1		Code	00-9298-14-M1		Code	PLED15	
Name	MARK 14W Fluor E27		Name	MARK 14W Fluor E27		Number	1	
Line	Eulumdat		Date	24-12-2010		Position		
Efficiency			57.98%		Coordinate system	CG	Total Flux	800.00 lm
Maximum value			70.76 cd		Position	C=30.00 G=85.00	Double Symmetrical	
Rectangular Luminaire Rectangular Luminous Area			Length	150 mm	Width	150 mm	Height	220 mm
			Length	150 mm	Width	150 mm	Height	160 mm
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°			0.022500 m2		Emitting area on Plane 180°		0.024000 m2	
			0.024000 m2		Emitting area on Plane 270°		0.024000 m2	
			0.024000 m2		Glare area at 76°		0.028730 m2	
Symmetry Type			Double Symmetrical		Maximum Gamma Angle		180	
Measurement Distance			0.00		Measurement Flux		800.00 lm	
Operator			Asselum T3		Source voltage			
Temperature			25.00 °C		Source current			
Humidity			60.00 %		Photocell			
Notes								

Luminaire Lamps						
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty	
Eulumdat	PLED15	PLED15 - 15.00 W	800.00	15.00	1	
C.I.E.	2 16 53 47 58	D DIN 5040				
F UTE	--	B NBN				
		C12				
		BZ 10				


150mm x 150mm





C Halfplanes

180.0 — 0.0
270.0 — 90.0

ULOR 30.87 %
DLOR 27.11 %
RN 53.25 %

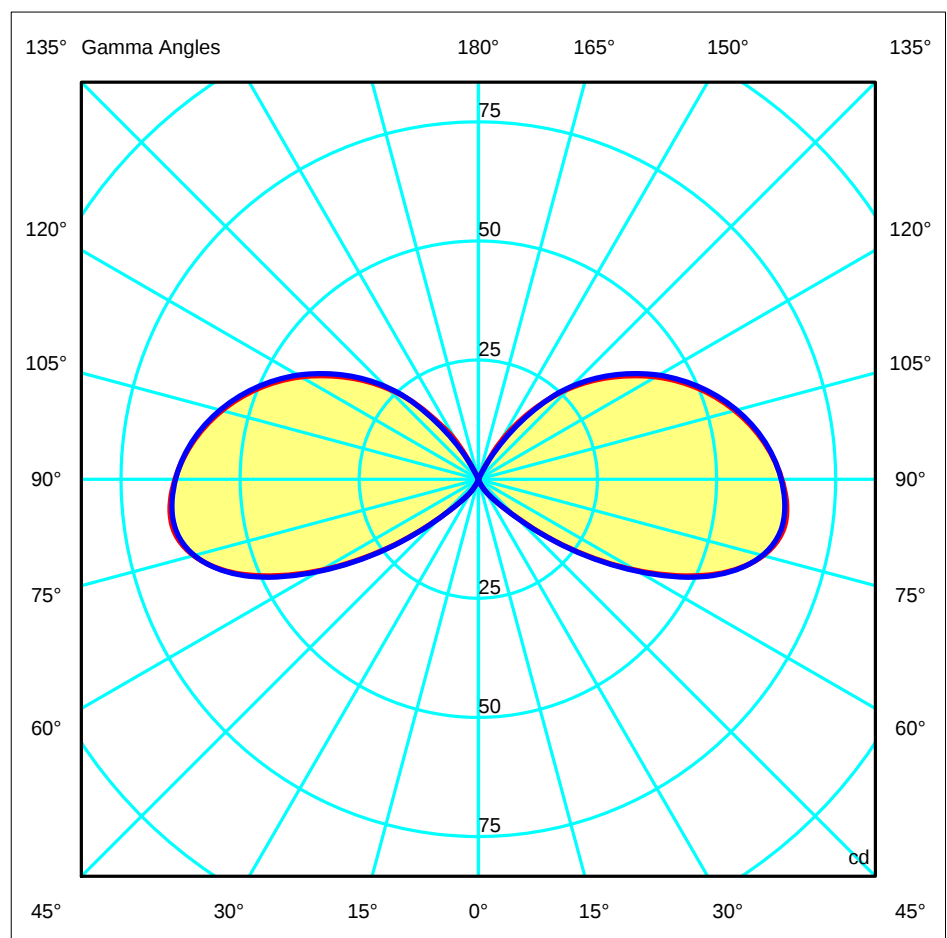

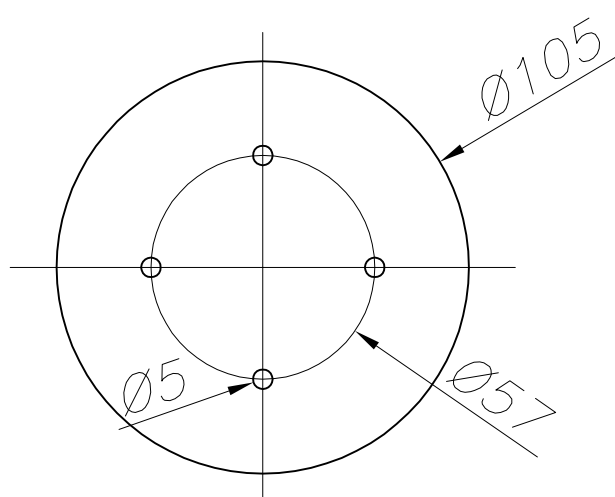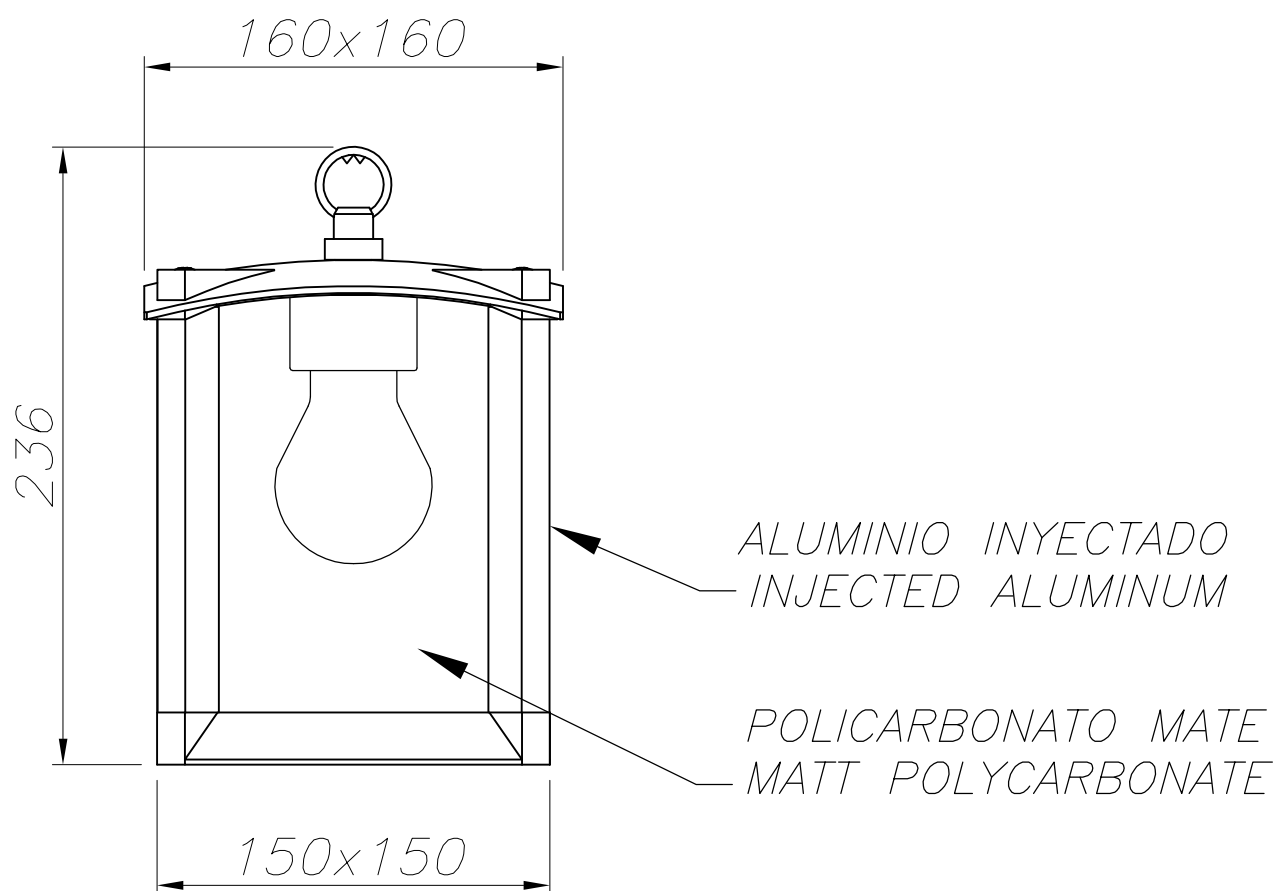

PLANTILLA DE INSTALACIÓN
INSTALLATION TEMPLATE




LEDSC4


OUTDOOR

00-9298


1

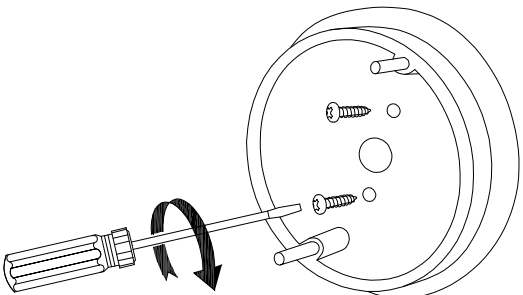

2

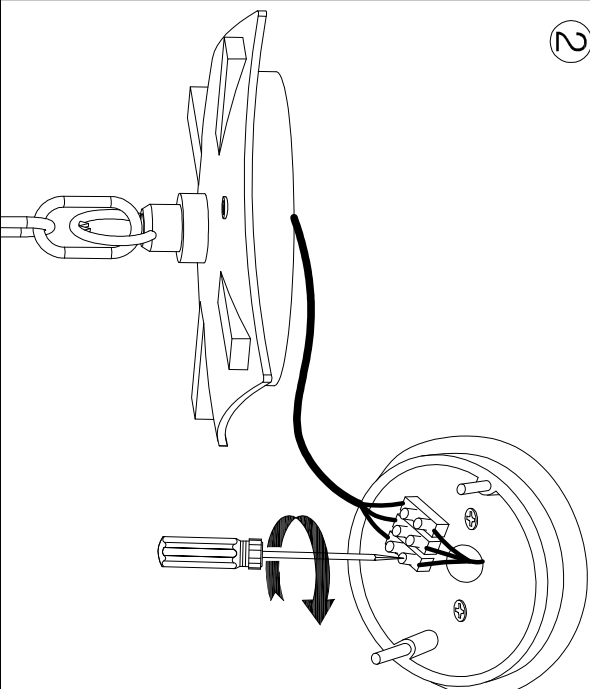

3

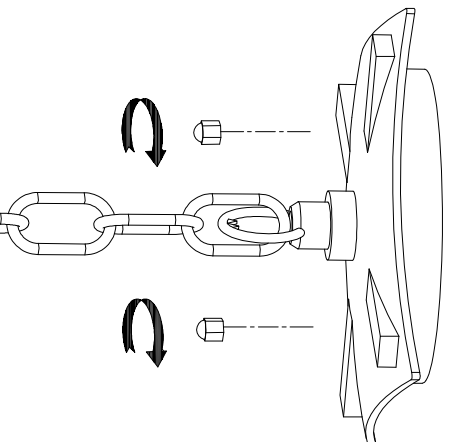

4

