




The photograph may not match the reference exactly. Please read the product description to identify the finish.

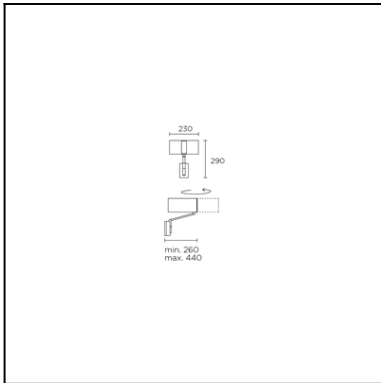

TECHNICAL CHARACTERISTICS

Type:	Wall fixture
Adjustable:	Adjustable 350° on the vertical axis.
IP Protection degrees:	IP20
Light source 1:	1 x E27 MAX 60W Maximum lamp length: 130.00 mm Maximum lamp diameter: 70.00 mm
Total power consumption (W):	60
Voltage / Frequency:	220-240V/50-60Hz
Warranty (Years):	2
Units per box:	1
Net Weight (Kg):	1.17
EAN:	8435111066102



MATERIALS / FINISHES


Structure material: Steel

Diffuser material: Fabric shade
Acrylic


Structure finish: Satin nickel

Diffuser finish: White
Matt

E 27 60W



Download photometric file .ldt / .ies

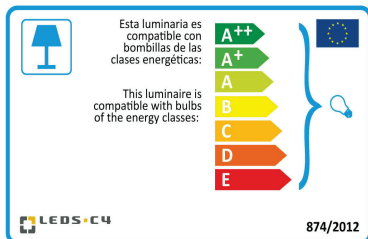


Click on image to download energy label

Luminaire		Measur.		Lamp	
Code	05-2817-81-14	Code	05-2817-81-14	Code	CLAS A CL 60
Name	Apliche TWIST 60W E27 blanca	Name	Apliche TWIST 60W E27 blanca	Number	1
Line	Eulumdat	Date	27-07-2010	Position	
Efficiency	83.06%	Coordinate system	CG	Total Flux	710.00 lm
Maximum value	107.28 cd	Position	C=15.00 G=175.00	Asymmetrical	
Round Luminaire	Diam.	230 mm	Height	110 mm	
Round Luminous Area	Diam.	230 mm	Height	110 mm	
Horizontal Luminous Area	0.041548 m2	Emitting area on Plane 180°	0.025300 m2		
Emitting area on Plane 0°	0.025300 m2	Emitting area on Plane 270°	0.025300 m2		
Emitting area on Plane 90°	0.025300 m2	Glare area at 76°	0.034600 m2		
Symmetry Type	Asymmetrical	Maximum Gamma Angle	180		
Measurement Distance	0.00	Measurement Flux	710.00 lm		
Operator	Asselum	Source voltage			
Temperature	25.00 °C	Source current			
Humidity	60.00 %	Photocell			
Notes					

Luminaire Lamps					
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
Eulumdat	CLAS A CL 60	CLAS A CL 60 - 60.00 W	710.00	60.00	1
C.I.E.	36 75 93 57 83	D DIN 5040			
F UTE	0.47 H + 0.36 T	B NBN			
		C21			
		BZ 6 / 1.25 / BZ 5			


Diam=230mm


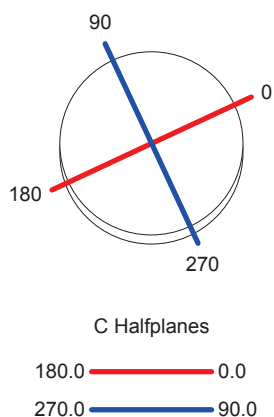


ULOR 35.76 %

DLOR 47.31 %

RN 43.05 %

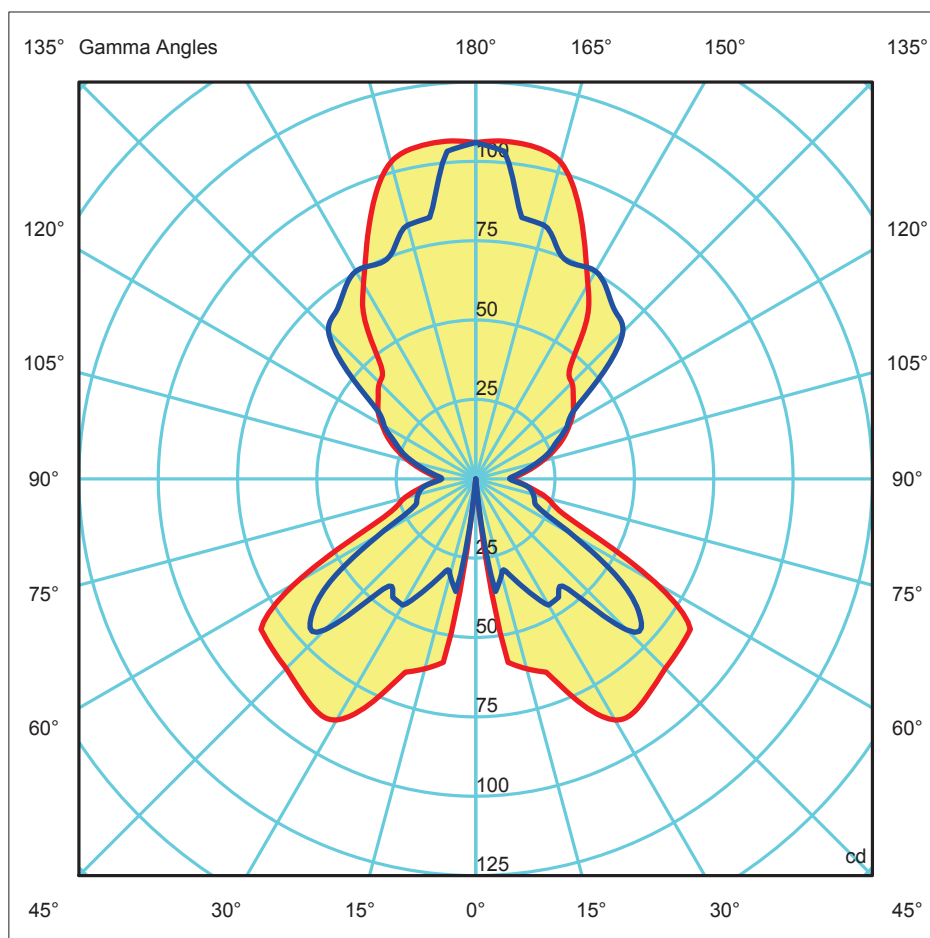


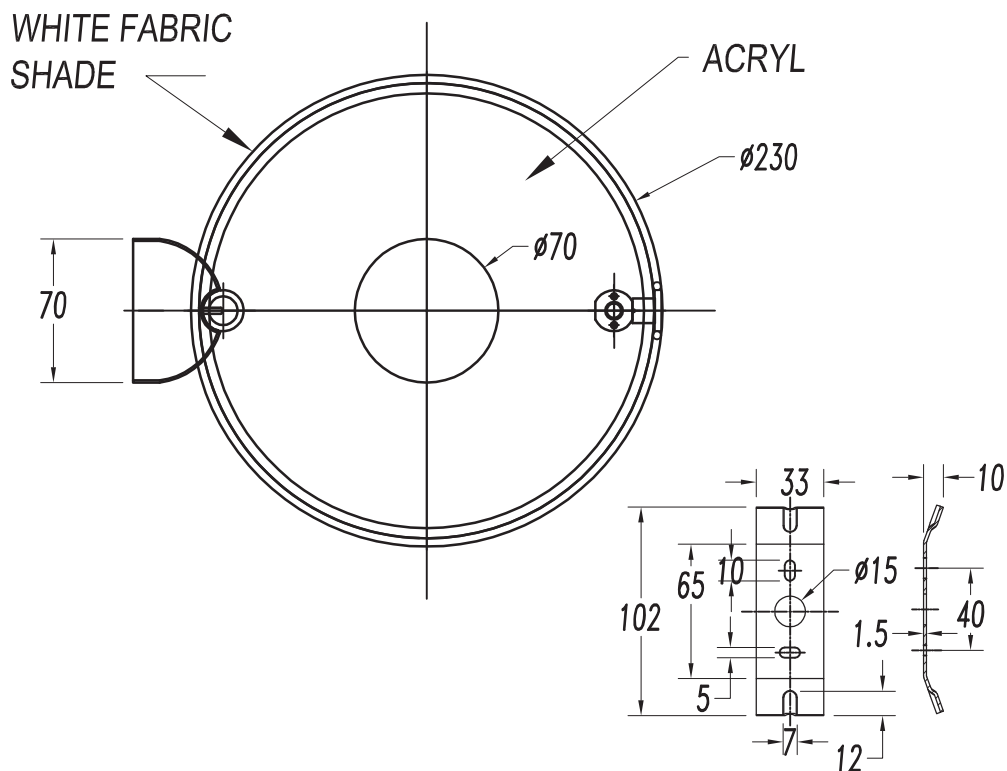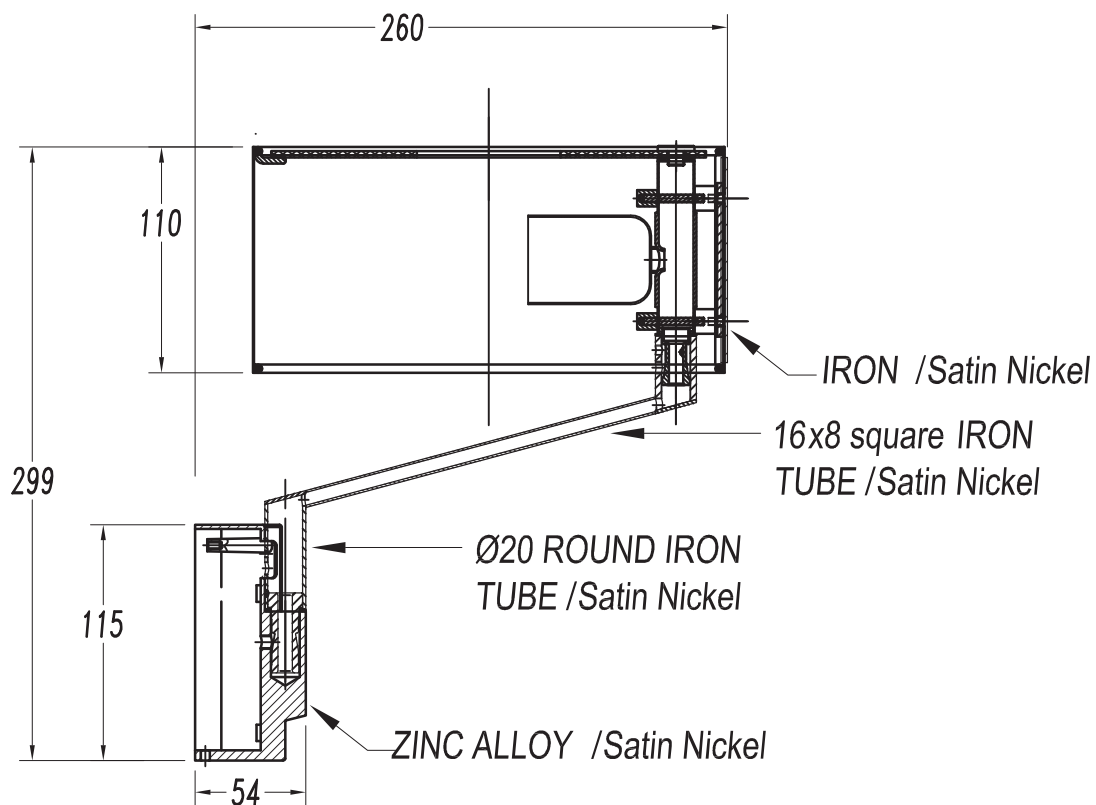




LED S-C4

1

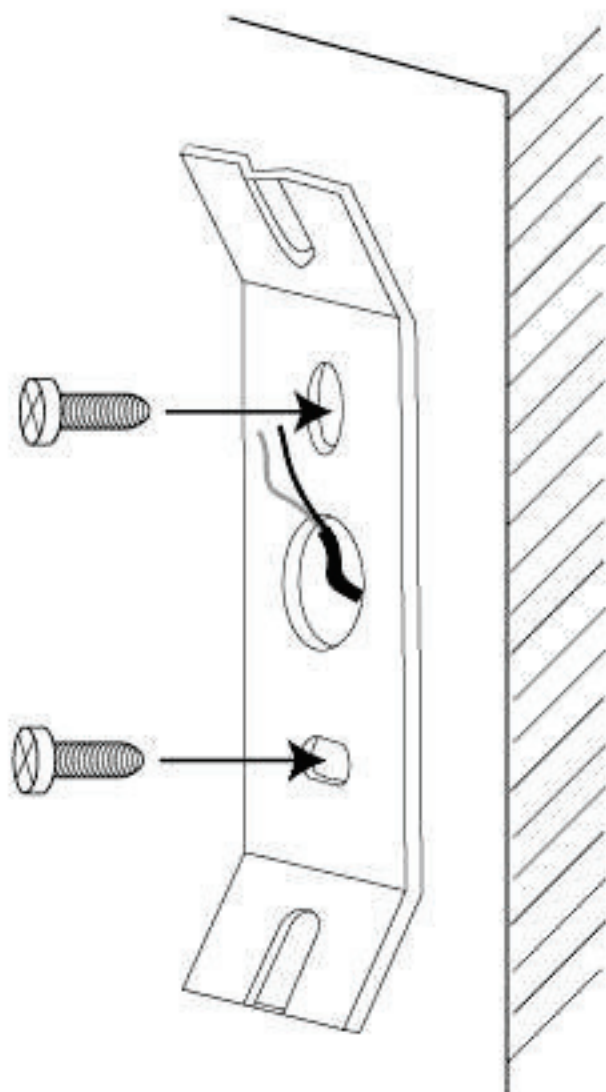

3

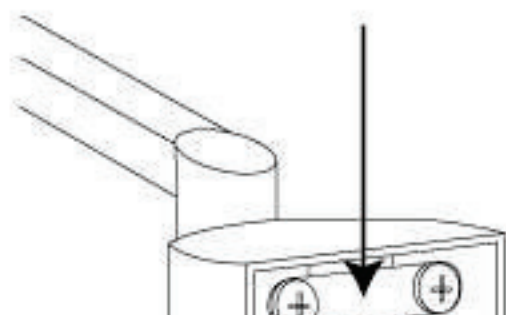

4

